


Fencing Specifications

Components	Residential Series	Commercial Series	Industrial Series
Pickets	5/8" sq. x .050	3/4" sq. x .055	1" sq. x .062
Ultra Picket	1" x 5/8" x .062		
Light Commercial Picket	1" x 5/8" x .050		
Rails Top Wall	1 1/8" x .062	1 3/8" x .065	1 5/8" x .070
Side Wall	1" x .080	1 1/4" x .088	1 5/8" x .100
Standard Posts	2" sq. x .060	2" sq. x .080	2 1/2" sq. x .100
	2" sq. x .080	2" sq. x .125	3" sq. x .125
	2" sq. x .125	2 1/2" sq. x .100	
	2 1/2" sq. x .100	3" sq. x .125	
Gate Posts	2" sq. x .125	3" sq. x .125	3" sq. x .125
	2 1/2" sq. x .100	4" sq. x .125	4" sq. x .125
Picket Spacing	3 13/16"	3 5/8"	3 5/8"
	1 5/8" optional	1 1/2" optional	1 1/2" optional
Ultra Picket	3 3/16"		
Post Spacing	72 1/2" on center	72 1/2" on center	72 3/8" on center
			8' wide optional
Heights Available	36" 42" 48"	36" 42" 48"	36" 48" 60" 72"
	54" 60" 72"	54" 60" 72"	84" 96" 108" 120" 132" 144"

Colors

Ultra Fencing, Railing, Gates and Designer Accessories are available in nine classic colors as well as custom specified hues. All colors are applied with a special Powercoat™ finish to resist harsh weather and heat.

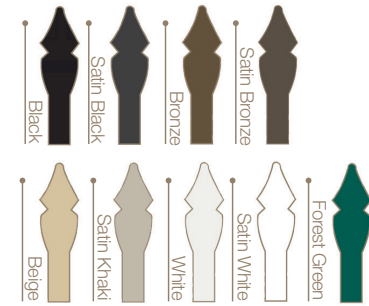

Colors shown represent an approximate comparison and may vary slightly from actual product color.

Finish:

Advanced Powercoat™ allows us to produce a high quality, long lasting finish, which is also environmentally friendly. Powercoat is twice the thickness and hardness of a typical baked enamel finish. Meets AAMA 2604-5 standards for the ultimate in durability and UV protection.

Materials:

All Ultra Fence™ components are extruded from Ultrum™ 6005-T5 alloy, with a minimum ultimate strength of 35,000 psi. Every fence system is assembled with stainless steel, corrosion resistant fasteners, with heads painted to match the finish of the fence. Ultra offers posts in a variety of thicknesses, punched to accept the channel on the fence. Designer Accessories are zinc die cast aluminum. All Designer Accessories are Powercoat™ finished.

Ultra Aluminum Lifetime Warranty

Ultra Aluminum fence and railing products are guaranteed for life against defects in workmanship and/or materials. The Powercoat™ finish on all fencing and railing by Ultra Aluminum is guaranteed for life against cracking, peeling or chipping.


Visit our website for more information and a copy of the warranty.

Environmentally Responsible


Ultra is proud to use recycled aluminum in our products. Aluminum is the most commonly recycled metal in the world. Our Powercoat™ coating process is environmentally friendly and virtually pollution-free.

Design Options


Ultra Fencing is available in a wide selection of design configurations.




UAF-200 Flat-Top




UAF-250 Flat-Top with Spear




UAF-201 Flat-Top with 1-5/8" Spacing




UAB-200 Flat-Top Flush




UAS-100 Spear Top




UAS-150 Staggered Spear




UAS-101 Spear Top with 1-5/8" Spacing




Eclipse™ Privacy



UAS-300 Concave



UAS-350 Convex



UAB-400 Ultra Picket



Finish:

Advanced Powercoat™ allows us to produce a high quality, long lasting finish, which is also environmentally friendly. Powercoat is twice the thickness and hardness of a typical baked enamel finish. Meets AAMA 2604-5 standards for the ultimate in durability and UV protection.

Materials:

All Signature Collection railing components are extruded from Ultrum™ 6005-T5 alloy, with a minimum ultimate strength of 35,000 psi. Every railing system is assembled with stainless steel, corrosion resistant fasteners. Signature Collection posts come in a variety of thicknesses. Designer Accessories are zinc die cast aluminum. All Designer Accessories are Powercoat™ finished.

Ultra Aluminum Lifetime Warranty

Ultra Aluminum fence and railing products are guaranteed for life against defects in workmanship and/or materials. The Powercoat™ finish on all fencing and railing by Ultra Aluminum is guaranteed for life against cracking, peeling or chipping. **Visit our website for more information and a copy of the warranty.**

Environmentally Responsible


Ultra is proud to use recycled aluminum in our products. Aluminum is the most commonly recycled metal in the world. Our Powercoat™ coating process is environmentally friendly and virtually pollution-free.

Railing Specifications


Components	Post-to-Post	Continuous
Square Picket	¾" sq. x .055 thickness	¾" sq. x .055 thickness
Monticello Balluster Round	¾" round x .070 thickness	¾" round x .070 thickness
Hand Rail Top Cap Franklin	1.337 h x 2.250 w 0.080 thickness	1.700 h x 2.250 w 0.080 thickness
Jefferson	1.337 h x 2.250 w 0.080 thickness	1.692 h x 2.250 w 0.080 thickness
Madison	1.601 h x 2.000 w 0.080 thickness	2.050 h x 2.500 w 0.080 thickness
Hamilton	2.488 h x 1.716 w 0.080 thickness	2.491 h x 2.078 w 0.080 thickness
Bottom Rail	1.305 h x 1.352 w 0.070 thickness	1.305 h x 1.352 w 0.070 thickness
Boss Screw Posts	2½" sq. x 0.100	2" sq. x 0.080
	3" sq. x 0.125	2" sq. x 0.125
Spacing Between Pickets	3 ⅝" (1 ⅜" available)	3 ⅝" (1 ⅜" available)
Post Spacing	72 ½" on center based on 2 ½" post (8' wide available)	72" on center based on 2" post (8' wide available)
Heights Available	36" & 42"	36" & 42"
Signature Columns and Newel Posts	6" sq. 0.100 thickness	6" sq. 0.100 thickness
	8" sq. 0.100 thickness	8" sq. 0.100 thickness

Design Options


Signature has more handrail designs than most of our competitors, with a profile and color to fit all types of architecture.




UAR-200-2R Two Rail




UAR-200-3R Three Rail



UAR-250-3R Three Rail




UAR-250-3RS Three Rail with Spears



Signature Glass Railing

Profile Options

Post-to-Post Style



Franklin



Jefferson




Madison



Hamilton

Colors

Ultra Fencing, Railing, Gates and Designer Accessories are available in nine classic colors as well as custom specified hues. All colors are applied with a special Powercoat™ finish to resist harsh weather and heat.

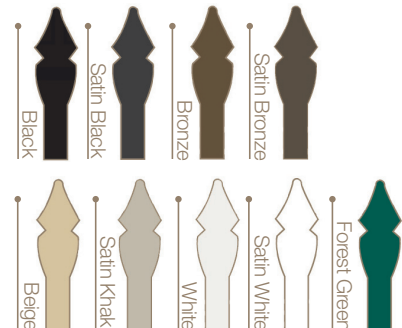

Colors shown represent an approximate comparison and may vary slightly from actual product color.

